

HERITAGE RADIANT™




EPA: 1.7 WEIGHT: 38 lbs (max.)
5 Year Limited Warranty on LED System
ETL Listed To UL1598 Standards For Wet Locations

Proportion, aesthetics and detailing have been incorporated in a luminaire of outstanding traditional design and authentic appearance that is eminently suitable for many applications. Pemco engineering provides top quality and specification type construction.

These types of light distribution, IES Type II, III, IV and V, are available to meet varying conditions and design requirements and are "full cut-off". The direction of distribution is controlled by a simple field adjustment (rotation) of the entire fixture.

Post mounting heights of 8 to 14 feet and wall mounting for architectural applications are offered. The Heritage luminaire will enhance any location. Separate surge protectors in addition to all drivers, are installed in the circuitry as a company standard.

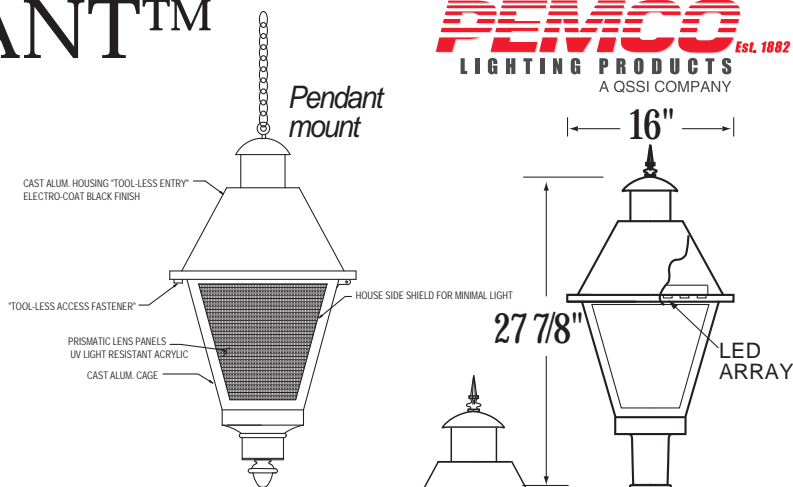

See Pedestrian size next page.

LED LIGHT ENGINE SPECIFICATIONS:

INITIAL LUMENS BASED ON 219B CHIPS

MODEL#	WATTAGE	INITIAL LUMENS	SYSTEM EFFICACY	CCT	CRI	IES DISTRIBUTIONS
40W35C5K	40	4720	118	5K	65	Type II, III, IV, V
45W35C5K	46	5290	115	5K	65	Type II, III, IV, V
70W60C5K	70	8260	118	5K	65	Type II, III, IV, V
80W60C5K	80	9200	115	5K	65	Type II, III, IV, V
40W35C4K	40	4480	112	4.3K	65	Type II, III, IV, V
45W35C4K	46	5014	109	4.3K	65	Type II, III, IV, V
70W60C4K	70	7840	112	4.3K	65	Type II, III, IV, V
80W60C4K	80	8720	109	4.3K	65	Type II, III, IV, V
40W35C3K	40	3480	87	3.5K	80	Type II, III, IV, V
45W35C3K	46	3910	85	3.5K	80	Type II, III, IV, V
70W60C3K	70	6090	87	3.5K	80	Type II, III, IV, V
80W60C3K	80	6800	85	3.5K	80	Type II, III, IV, V
45W35C2K	46	3680	80	2.7K	80	Type II, III, IV, V
80W60C2K	80	6400	80	2.7K	80	Type II, III, IV, V

With scroll

Shown (left): Heritage LED luminaire on 12' pole, straight, smooth shaft and cast base PLB-014-4.

ORDERING FORMAT SURGE PROTECTION DEVICE MEETS IEEE C62.41 2002 C HIGH 10kA See spec sheet on page J12.

MODEL # - LENS - LED MODEL # - VOLTAGE - IES DIST. - OPTIONS - FINISH
HER CL-ACR 80W60C5K UNIVERSAL TYPE III PC BK

OPTIONS

Lens CL-TG=Clear Tempered Glass FR-TG=Frosted Tempered Glass CL-ACR=Clear Acrylic WH-ACR= White Acrylic FR-POLY=Frosted Polycarbonate CL-POLY=Clear Polycarbonate DP-32 ACR=Double Pattern	Optical LED Optical Lens (Mounted on LED) II, III, IV, V CL=Clear Lens	Electrical PC=Photo Control Button FS=Fuse (single) FD=Fuse (double) Auto Sensing to 277V AC PCR-3PIN=Photocontrol Receptacle* PCR-7PIN=Photocontrol Receptacle*	Mounting SF=Slip Fitter (3") CWB=Cast Wall Bracket (6" or 15") WM=Wall Mount TM=Top Mount	Options Double finial Scroll Pendant mount
--	--	---	--	--

FINISH

Standard Colors BK=Black BZ=Medium Bronze DBZ=Dark Bronze WH=White GR=Green SM=Silver Metallic	Premium Colors VP=Verde Patina PP=Pewter Patina SS=Silver Sparkle CC=Custom color HG= Hartford Green TBK=Textured Black
---	--

All arrays are "Full Cut-off" *See Lighting Accessories & Equipment for more information. IP Rating: IP65

LED Engine by SANSI


HERITAGE PEDESTRIAN RADIANT™ (Medium Size) SINGLE & ARRAY LED SYSTEMS



Proportion, aesthetics and detailing have been incorporated in a luminaire of outstanding traditional design and authentic appearance that is eminently suitable for many applications. Pemco engineering provides top quality and specification type construction. This type of light distribution, IES Type V, is available to meet varying

EPA: 1.7 WEIGHT: 20 lbs (max.)
5 Year Limited Warranty on LED System
ETL Listed To UL1598 Standards For Wet Locations

conditions and design requirements and is "full cut-off". The direction of distribution is controlled by a simple field adjustment (rotation) of the entire fixture. Post mounting heights of 8 to 14 feet and wall mounting for architectural applications are offered. The Heritage luminaire will enhance any location. Separate surge protectors in addition to all drivers, are installed in the circuitry as a company standard.



LED LIGHT ENGINE SPECIFICATIONS:

MODEL#	WATTAGE	INITIAL LUMENS	SYSTEM EFFICACY	CCT	CRI	IES DISTRIBUTIONS
SINGLE MODULE LED SYSTEM						
8W-850LM	9	850	97	2.7K, 3.0K, 3.5K, 4.0K	90	Type V
12W-1250LM	13	1250	97	2.7K, 3.0K, 3.5K, 4.0K	90	Type V
19W-2000LM	21	2000	97	2.7K, 3.0K, 3.5K, 4.0K	90	Type V
32W-3000LM	31	3000	97	2.7K, 3.0K, 3.5K, 4.0K	90	Type V
37W-4000LM	37	4000	108	2.7K, 3.0K, 3.5K, 4.0K	90	Type V
71W-6000LM	71	6000	85	3.0K, 3.5K, 4.0K	90	Type V
Note: The lumen values remain the same regardless of CCT.						
RADIANT™ LED ARRAYS SYSTEM INITIAL LUMENS BASED ON 219B CHIPS						
40W35C5K	40	4720	118	5K	65	Type II, III, IV, V
45W35C5K	46	5290	115	5K	65	Type II, III, IV, V
40W35C4K	40	4480	112	4.3K	65	Type II, III, IV, V
45W35C4K	46	5014	109	4.3K	65	Type II, III, IV, V
40W35C3K	40	3480	87	3.5K	80	Type II, III, IV, V
45W35C3K	46	3910	85	3.5K	80	Type II, III, IV, V
45W35C2K	46	3680	80	2.7K	80	Type II, III, IV, V

SURGE PROTECTION DEVICE MEETS IEEE C62.41 2002 C HIGH 10kA See spec sheet on page J12.

Shown (left): Heritage LED Pedestrian luminaire on 12' pole, straight, smooth shaft and cast base PLB-014-4.

ORDERING FORMAT

MODEL # - LENS - LED MODEL # - VOLTAGE - IES DIST. - OPTIONS - FINISH
HER-MED OP-ACR 45W35C2K UNIVERSAL TYPE V PC BK

OPTIONS

Lens FL=Flat Lens CL=Clear FR=Frosted OP=Opal WH=White DP-32 ACR= Double Pattern	Materials ACR=Acrylic POLY= Polycarbonate TG=Tempered Glass	Optical LED Optical Lens (Mounted on LED) V CL=Clear Lens	Electrical PC=Photo Control Button FS=Fuse (single) FD=Fuse (double) Auto Sensing to 277V AC PCR-3PIN=Photocontrol Receptacle* PCR-7PIN=Photocontrol Receptacle*	Mounting SF=Slip Fitter (3") CWB=Cast Wall Bracket (6" or 15") WM=Wall Mount TM=Top Mount	Options Double finial Scroll Pendant mount
---	---	---	---	--	--

FINISH

Standard Colors BK=Black BZ=Medium Bronze DBZ=Dark Bronze WH=White GR=Green SM=Silver Metallic	Premium Colors VP=Verde Patina PP=Pewter Patina SS=Silver Sparkle CC=Custom color HG= Hartford Green TBK=Textured Black
---	--

All arrays are "Full Cut-off" *See Lighting Accessories & Equipment for more information. IP Rating: IP65

LED Engine by **SANSI**