

PORTSMOUTH RADIANT™




This attractive luminaire is similar to the Heritage, instead of the angular top, the Portsmouth is rounded to give the fixture a smooth, flowing appearance. As with all Pemco fixtures, cast aluminum construction gives long lasting service and durability to this luminaire.

IES light distributions of Type II, III, IV and V, are available to meet varying

conditions and design requirements and are "full cut-off". The direction of distribution is controlled by a simple field adjustment (rotation) of the entire fixture. Post mounting heights of 8 to 14 feet and wall mounting for architectural applications are offered. The Portsmouth luminaire will enhance any location. Separate surge protectors in addition to all drivers, are installed in the circuitry as a company standard.

EPA: 1.7 WEIGHT: 38 lbs (max.)
5 Year Limited Warranty on LED System
ETL Listed To UL1598 Standards For Wet Locations

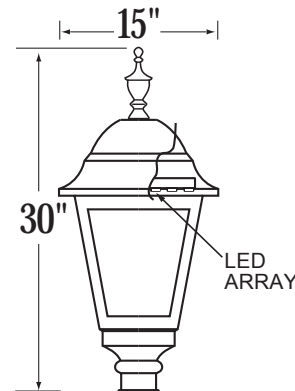

LED LIGHT ENGINE SPECIFICATIONS:

INITIAL LUMENS BASED ON 219B CHIPS

MODEL#	WATTAGE	INITIAL LUMENS	SYSTEM EFFICACY	CCT	CRI	IES DISTRIBUTIONS
40W35C5K	40	4720	118	5K	65	Type II, III, IV, V
45W35C5K	46	5290	115	5K	65	Type II, III, IV, V
70W60C5K	70	8260	118	5K	65	Type II, III, IV, V
80W60C5K	80	9200	115	5K	65	Type II, III, IV, V
40W35C4K	40	4480	112	4.3K	65	Type II, III, IV, V
45W35C4K	46	5014	109	4.3K	65	Type II, III, IV, V
70W60C4K	70	7840	112	4.3K	65	Type II, III, IV, V
80W60C4K	80	8720	109	4.3K	65	Type II, III, IV, V
40W35C3K	40	3480	87	3.5K	80	Type II, III, IV, V
45W35C3K	46	3910	85	3.5K	80	Type II, III, IV, V
70W60C3K	70	6090	87	3.5K	80	Type II, III, IV, V
80W60C3K	80	6800	85	3.5K	80	Type II, III, IV, V
45W35C2K	46	3680	80	2.7K	80	Type II, III, IV, V
80W60C2K	80	6400	80	2.7K	80	Type II, III, IV, V

Shown (left):
Portsmouth
Luminaire with LED
on a straight smooth
extruded pole with
cast decorative base
PLB-014 (AA)

SURGE PROTECTION DEVICE MEETS IEEE C62.41 2002 C HIGH 10kA See spec sheet on page J12.

ORDERING FORMAT

MODEL # - LENS - LED MODEL # - VOLTAGE - IES DIST. - OPTIONS - FINISH
 POR CL-ACR 45W35C3K UNIVERSAL TYPE III PC BK

OPTIONS				FINISH	
Lens CL-TG=Clear Tempered Glass FR-TG=Frosted Tempered Glass CL-ACR=Clear Acrylic WH-ACR= White Acrylic FR-POLY=Frosted Polycarbonate CL-POLY=Clear Polycarbonate DP-32 ACR=Double Pattern FR-ACR=Frosted Acrylic	Optical II III IV V CL=Clear Lens	Electrical PC=Photo Control Button FS=Fuse (single) FD=Fuse (double) Auto Sensing to 277V AC	Mounting SF=Slip Fitter (3") WM=Wall Mount TM=Top Mount	Standard Colors BK=Black BZ=Medium Bronze DBZ=Dark Bronze WH=White GR=Green SM=Silver Metallic	Premium Colors VP=Verde Patina PP=Pewter Patina SS=Silver Sparkle CC=Custom color HG= Hartford Green TBK=Textured Black

All arrays are "Full Cut-off"

IP Rating: IP65

LED Engine by **SANSI**